

EP.SR101

Mifare Desfire Mini Reader

Features

- Read full 56 bits UID, Application & Files content of Desfire card.
- Support 3DES & AES encrypted communication between the reader and card.
- Support on site Reader Configuration Card to change certain parameters.
- Tamper protection.



Universal back plate allows the reader be installed on different size of gang box.



All weather proof design with IP65 certificate.



All input and output signals are protected against static charges.



Reverse power protection

12V

All inputs are 12V DC Protected.



Non-drop bottom screw made servicing handier.

EP.SR101

Mifare Desfire Mini Reader



Technical Specification

Functions \ Model	Standard
Re-configure Window	5 seconds (Default)
Reader Output Format	Mifare & Desfire
Buzzer Control	Reader & Controller control (Default) or Controller control only
LED / Backlit Control	Yes
Reader Standard Output	OSDP
Typical Read Range	1 - 2 cm
Baud Rate	9600 (Default)
Input Voltage	10 - 15VDC
Operating Current	150mA (max)
Operating Temperature	-30°C -70°C
Exterior Dimension	84.05(L) x 54.05mm(W) x 16.5mm(H)
NFC Ready	Yes


EP.SR101

Mifare Desfire Mini Reader

Technical Specification

Case Material	PC+ABS
Standard Color	Black
Operating Humidity	10% - 90%
Weight	160g

Dimension

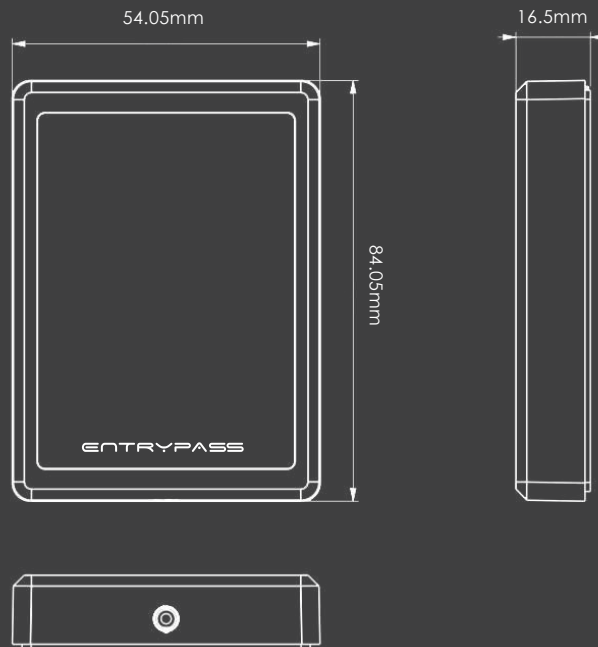

Ordering Information

EP.SR101

Entrypass mini smart reader that support Mifare & Mifare Desfire Ev1/Ev2 card with OSDP protocol



www.entrypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong,
Batu 12 Jalan Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entrypass.net

Singapore

No. 1, UBI View, #03-03, Focus ONE Building,
Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entrypass.net

Indonesia

PT Brikom Entripas Indonesia
Jl. Griya Utama, Komplek Puri Mutiara Blok BF No. 17,
RT.1/RW.20, Sunter Agung, Tj. Priok, Kota Jkt Utara,
Daerah Khusus Ibukota Jakarta 14350.
Tel : +62 21 2937 6098
Email : info@entrypass.net