


EP.FR2006M


Entrypass Facial Recognition Terminal

Features

- 4.3-inch LCD touch screen
- 2 Mega pixel wide angle-lens
- Recognition distance: 0.3 to 3 m
- Face recognition duration < 0.2 s/ User
- Face recognition accuracy rate > 99%
- Built- in Mifare card and DesFire card reading module (Presents card on the screen to authenticate)
- 6000 face capacity, 5000 fingerprints capacity, 10,000 card capacity and 150,000 event capacity
- Face mask detection with force mask wearing alert
- Supports ISAPI, ISUP 5.0, NetSDK protocol
- Configuration via the web client

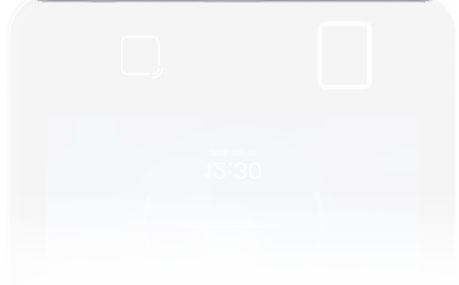

No.	Description
①	Loudspeaker
②	Micro USB to USB cable is available
③	IR Light
④	Camera
⑤	Camera
⑥	IR Light
⑦	Display Screen
⑧	Fingerprint Module
⑨	Card Presenting Area
⑩	TAMPER
⑪	Wiring Terminal
⑫	Debugging Port
⑬	Network Interface

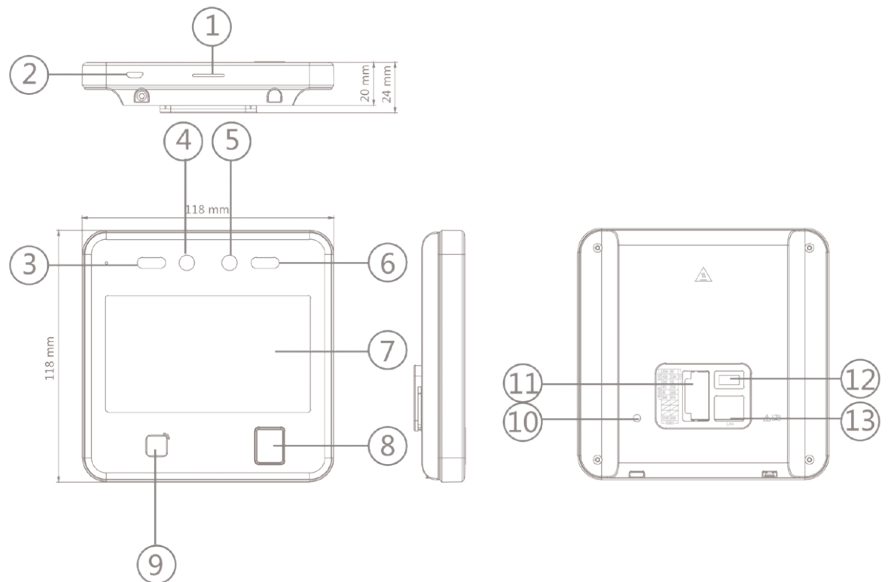

EP.FR2006M

Entrypass Facial Recognition Terminal



Technical Specification

Operation system	Linux
Screen	4.3 Inch
Type	IPS Full Screen
Pixel	2MP
Lens	DUAL-Lens
Tone quality	Noise suppression and echo cancellation
Wired Network	Support 10 M/ 100 M/ 1000 M self-adaptive
Network interface	1
Lock output	1
Exit button	1
Door contact input	1
RS- 485	1
Wiegand	1
Power interface	2-pin
Card capacity	10,000
Face capacity	6000
Event capacity	150,000

EP.FR2006M

Entrypass Facial Recognition Terminal


Technical Specification

Fingerprint capacity	5000
Face recognition accuracy rate	> 99%
Card type	Mifare card / DesFire card
Card reading frequency	13.56MHz
Face recognition duration	< 0.2 s per person
Face recognition distance	0.3 to 3 m
Time synchronization	Support
Face anti spoofing	Support
Audio prompt	Support
Power supply method	12V/2A
Working temperature	- 10 c to 50 c (- 14 F to 122 F)
Working humidity	0 to 90% (no condensing)
Dimensions	118mm x 118mm x 20mm (4.6" x 4.6" x 0.7")
Application environment	Indoor
Installation	Surface, optional base stand
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)

EP.FR2006M

Entrypass Facial Recognition Terminal

Dimension

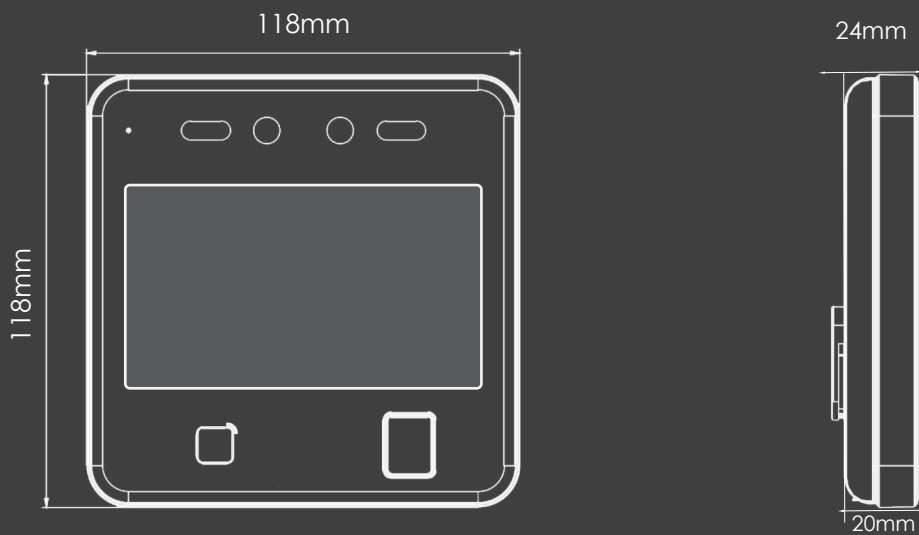

Ordering Information

EP.FR2006M

Entrypass Facial Recognition Terminal. Support 6000 Facial Template Capacity and MIFARE Reader.



www.entrypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong,
Batu 12 Jalan Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entrypass.net

Singapore

No. 1, UBI View, #03-03, Focus ONE Building,
Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entrypass.net

Indonesia

PT Brikom Entripas Indonesia
Jl. Griya Utama, Komplek Puri Mutiara Blok BF No. 17,
RT.1/RW.20, Sunter Agung, Tj. Priok, Kota Jkt Utara,
Daerah Khusus Ibukota Jakarta 14350.
Tel : +62 21 2937 6098
Email : info@entrypass.net