

MIFARE 1 S50 ISO CARD

PC.MIFARE.1K


Features

- Meets ISO standards for thickness; use with all direct image or thermal transfer printers.
- Passive, no-battery design allows for an infinite number of reads.
- Strong, flexible and resistant to cracking and breaking.

Technical Specification

Description	1K Byte, R/W, 13.56MHz, Data retention of 10 years, Write endurance 10,000 cycles
IC types	MIFARE Standard MF1 IC S50 NXP founded by philips
Frequency	13.56MHz
Size	85.60mm x 53.98mm x 0.8mm
Weight	5.8g
Printing	Printable with offset, silkscreen, personalizing. Printable with ink Jet numbering (various different format)
MagStripe	Optional Loco 350 Oe, Hico650 Oe, 2750 Oe and 4000 Oe at ISO position.
Temperature	-10°C and + 50°C
Material	PVC, PET

Dimension

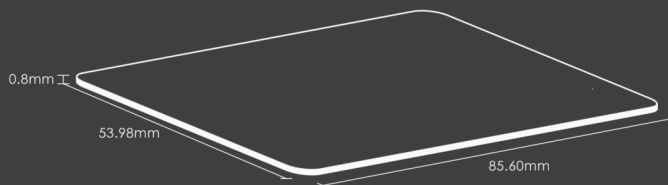

Ordering Information

PC.MIFARE.1k Entrypass Mifare ISO card (1k bytes)



www.entriypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong,
Batu 12 Jalan Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entriypass.net

Singapore

No. 1, UBI View, #03-03, Focus ONE Building,
Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entriypass.net

Indonesia

PT Brikom Entripas Indonesia
Jl. Griya Utama, Komplek Puri Mutiara Blok BF No. 17,
RT.1/RW.20, Sunter Agung, Tj. Priok, Kota Jkt Utara,
Daerah Khusus Ibukota Jakarta 14350.
Tel : +62 21 2937 6098
Email : info@entriypass.net