



EPR-410S

4 channel NVR with POE . 1 HDD

Features

- Up to 4-ch IP cameras access
- Up to 40 Mbps incoming/outgoing bandwidth
- Up to 1-ch @ 12MP/4-ch @ 4MP decoding capacity
- Support mask detection, face recognition and multi-objective recognition
- Support VCA alarm linkage
- Plug & Play with 4 PoE interface
- Support 1 HDMI and 1 VGA interface

Technical Specification

IP Camera Input	4 Channel
Incoming Bandwidth	40 Mbps
Outgoing Bandwidth	40 Mbps
HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
VGA Output	1920×1080, 1280×1024, 1024×768
Decoding Capacity	1ch 12MP, 4ch 4MP Enable Local Intelligence: 1ch 8MP, 4ch 1080P
Dual Stream	Support
Multi-screen Display	1/4
Face Comparison	Real-time captured and display faces comparison results (registrant (name and ID), stranger, channel, similarity)
Multi-objective	Real-time captured and display vehicle, human body, non-motor vehicle, and faces comparison results (registrant, stranger, channel, similarity)
Smart Search	Time, Properties, Pictures
Trigger Event	Buzzer, Alarm push, Alarm prompt, Email, Alarm Out, Compare the result simultaneously, etc.

EPR-410S

4 channel NVR with POE . 1 HDD



Technical Specification

Resolution	12MP, 8MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Sync Playback	4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
General Alarm	Motion Detection, Video Loss, Alarm in, Alarm out
Intelligent Analysis (By Camera)	Smoking Detection, Smoke and Fire Detection, Fire Spot Detection, Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong way, Illegal Parking, People Counting, Enter Area, Leave Area, etc.
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Intrusion Detection (By NVR)	4ch, support the accurate detection of human and vehicle
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
P2P	Support
Interoperability	ONVIF, SDK, CGI
ANR	Support
Network Interface	1 RJ-45 10/100 Mbps self-adaptive Ethernet port
HDD Interface	1 SATA interfaces, up to 12TB capacity for each disk
HDMI	1
VGA	1
Audio I/O	1/1
Alarm I/O	4/1

EPR-410S

4 channel NVR with POE . 1 HDD



Technical Specification

PoE Interface	4 ports, 10/100Mbps, 802.3af, max 32W
USB Interface	Front panel: 2 × USB 2.0, Rear panel: 1 × USB 2.0
Reset Button	On-board reset button
Power Supply	DC48V/1.25A
Power Consumption	< 15 W (without HDD)
Operating Conditions	-10 °C - 50 °C (14 °F - 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	255mm(L) × 235.0 mm(W) × 45.3 mm(H)
Net Weight	0.9 kg (1.98 lb) without HDD

EPR-410S

4 channel NVR with POE . 1 HDD

Dimension

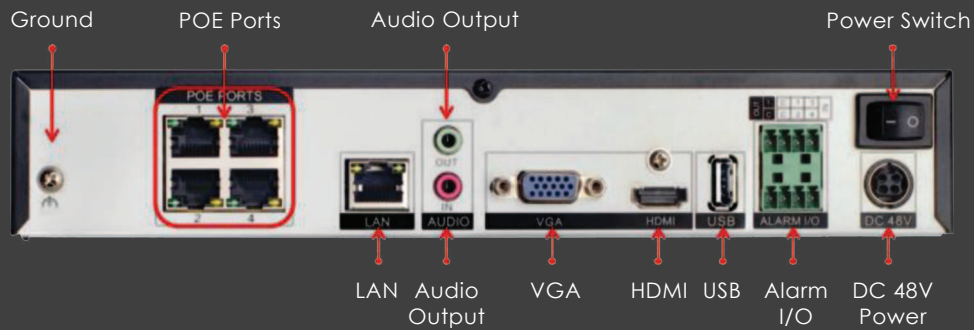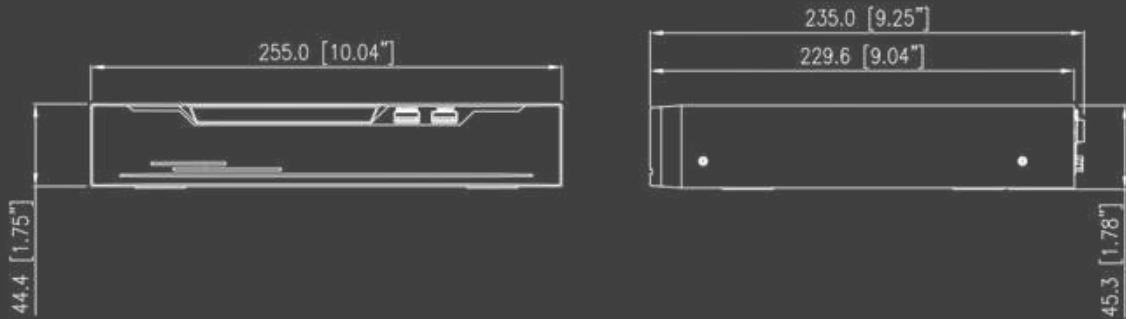

Ordering Information

EPR-410S

Entrypass 4 channel NVR with POE . 1 HDD



www.entrypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong,
Batu 12 Jalan Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entrypass.net

Singapore

No. 1, UBI View, #03-03, Focus ONE Building,
Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entrypass.net

Indonesia

PT Brikom Entrypas Indonesia
Jl. Griya Utama, Komplek Puri Mutiara Blok BF No. 17,
RT.1/RW.20, Sunter Agung, Tj. Priok, Kota Jkt Utara,
Daerah Khusus Ibukota Jakarta 14350.
Tel : +62 21 2937 6098
Email : info@entrypass.net