

EPR-6480

64 channel NVR, 8 HDD

Features

- Up to 64-ch IP cameras access
- Up to 400 Mbps incoming/outgoing bandwidth
- Up to 1-ch@12MP/4-ch@4MP/9-ch@1080P/16-ch@D1/32-ch@D1 decoding capacity
- Support mask detection, face recognition and multi-objective recognition
- Supports some specialist cameras, including people counting camera, ANPR camera, fisheye camera, panoramic camera and thermal camera
- Support fisheye Dewarping and VCA alarm linkage
- Up to 4-ch perimeter protection
- Support 2 HDMI and 1 VGA interface
- Support RAID 0/1/5/6/10 and N+1 hot spare

Technical Specification

IP Camera Input	64 Channel
Incoming Bandwidth	400 Mbps
Outgoing Bandwidth	400 Mbps
HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
HDMI 2 Output	1920×1080, 1280×1024, 1024×768
VGA Output	1920×1080, 1280×1024, 1024×768
Different Source Output	Support
Decoding Capacity	1ch 12MP, 4ch 4MP, 9ch 1080P, 16ch D1, 64ch D1
Dual Stream	Support
Multi-screen Display	1st Screen: 1/4/8/9/16/32/36/64 2nd Screen: 1/4/8/9/16
Face Comparison	Real-time captured and display faces comparison results (registrant (name and ID), stranger, channel, similarity)
Multi-objective	Real-time captured and display vehicle, human body, non-motor vehicle, and faces comparison results (registrant, stranger, channel, similarity)
Smart Search	Time, Properties, Pictures
Trigger Events	Buzzer, Alarm push, Alarm prompt, Email, Alarm Out, Compare the result simultaneously, etc.

EPR-6480

64 channel NVR, 8 HDD



Technical Specification

Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Sync Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network, eSATA
General Alarm	Motion Detection, Video Loss, Alarm in, Alarm out
Intelligent Analysis (By Camera)	Smoking Detection, Smoke and Fire Detection, Fire Spot Detection, Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong-way, Illegal Parking, People Counting, Smart motion detection, Enter Area, Leave Area, etc.
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Intrusion Detection (By NVR)	4-ch, support the accurate detection of human and vehicle
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
P2P	Support
Interoperability	ONVIF, SDK, CGI
ANR	Support
Disk Group	Support
RAID	RAID 0, RAID 1, RAID 5, RAID 6, RAID 10
HDD Interface	8 SATA interfaces, up to 16TB capacity for each disk
Network Interface	2 × RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
eSATA	1 eSATA Interface
HDMI	2
VGA	1

EPR-6480

64 channel NVR, 8 HDD



Technical Specification

Audio In/Out	1/1
Alarm In/Out	16/6
USB Interface	Front panel: 2 × USB 2.0, Rear panel: 1 × USB 3.0
RS-485 Interface	1
RS-232 Interface	1
Reset Button	On-board reset button
Power Supply	100 to 240VAC
Power Consumption	< 15 W (without HDD)
Operating Conditions	-10 °C to 50 °C (14 °F to 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	440mm (L) × 426mm (W) × 111.5mm (H)
Net Weight	7.3kg (16.09lb) without HDD

EPR-6480

64 channel NVR, 8 HDD

Dimension

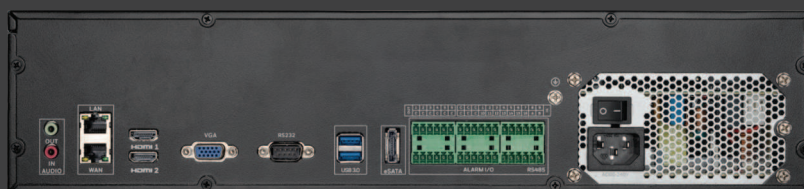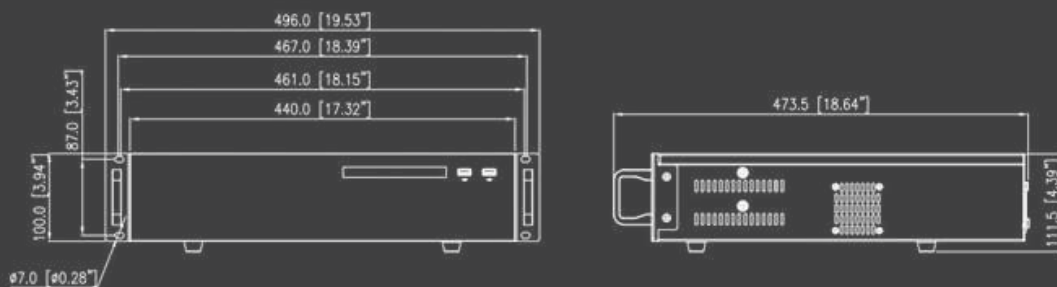

Ordering Information

EPR-6480 Entrypass 64 channel NVR, 8 HDD



www.entrypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong,
Batu 12 Jalan Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entrypass.net

Singapore

No. 1, UBI View, #03-03, Focus ONE Building,
Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entrypass.net

Indonesia

PT Brikom Entripas Indonesia
Jl. Griya Utama, Komplek Puri Mutiara Blok BF No. 17,
RT.1/RW.20, Sunter Agung, Tj. Priok, Kota Jkt Utara,
Daerah Khusus Ibukota Jakarta 14350.
Tel : +62 21 2937 6098
Email : info@entrypass.net