

EPC-LB6010R

2MP IR Fixed Bullet

Features

- 1/3" progressive scan CMOS
- Max. 2MP(1920×1080) @25/30fps resolution
- 2.8mm fixed lens (4mm optional)
- DWDR, 3D DNR, ROI, HLC, BLC, Defog
- Support intrusion, line crossing and smart motion detection based on human detection
- IR illumination distance up to 30m
- Built-in mic and micro SD card slot
- IP66

Technical Specification

Image Sensor	1/3" Progressive Scan CMOS
Max. Resolution	2MP (1920×1080)
Electronic Shutter	Auto/Manual, 1/5 to 1/100,000s
Min. illumination	Color: 0.01 Lux @ (F1.6, AGC ON), B/W: 0 Lux with light
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°
Lens Type	Fixed lens, fixed focal
Iris	Fixed Iris
Focal Length	2.8 mm
F Number	F1.6
Angle of View	H: 96°, V: 53°
Illuminator Type	IR
Illumination Distance	Up to 30 m (98.4 ft)
Illumination On/Off Control	Auto/Manual
Streaming Capability	2 Streams
Main Stream	1920×1080, 1280×720 @ 25/30fps
Sub Stream	704×480,, 640×360, 480×360, 352×240, @ 25/30fps

EPC-LB6010R

2MP IR Fixed Bullet



Technical Specification

Bit Rate Control	CBR/VBR
Bit Rate	Main Stream: 512 kbps to 4096 kbps Sub Stream: 128 kbps to 1536 kbps
Region of Interest	Off/On (8 areas, Rectangle)
Smart Encode	Support
Audio Compression	PCM, G711.a, G711.u, AAC
Audio Sampling Rate	8 KHz
Image Adjustment	Brightness, Sharpness, Contrast, Saturation adjustable
Aisle Mode	Support
Mirror	Support
White Balance	Auto/Manual
Day/Night Setting	Auto, Day, Night, Time
Smart IR	Support
Noise Reduction	2D/3D DNR
Image Enhancement	HLC, BLC, Defog, WDR
Wide Dynamic Range	DWDR
Privacy Masking	4 areas
Basic Events	Motion detection, Audio detection, Network alarm, Disk alarm, Login failure
Alarm Events	Alarm record, FTP upload, SMTP upload
Intelligent Analytics	Intrusion, line crossing and smart motion detection based on humanoid detection

EPC-LB6010R

2MP IR Fixed Bullet



Technical Specification

Protocols	IPv4/IPv6, RTSP/ RTP/RTCP, TCP/UDP, HTTPS, DHCP, DNS, DDNS, PPPoE, UPnP, ICMP IGMP, FTP, NTP, SMTP, 802.1x, SNMP
Interoperability	ONVIF (Profile S/T/G/M), SDK, CGI
User/Host Level	Up to 4 users, 3 levels: Administrator, Operator, Media user
Security	IP filter, encrypted HTTPS, IEEE 802.1x
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge
Reset Button	Support
SD Card Slot	Built-in, up to 1TB
Network Interface	1 Ethernet (10/100 Base-T) RJ-45 Connector
Built-in Microphone	Support
Language	English, Chinese (Simplified), French, Korean, Polish, Italian, Spanish, German, Hungarian, Russian, Vietnamese, Thai, Danish, Czech, Slovak, Indonesian, Portuguese, Dutch, Hebrew, Arabic
Power Supply	DC12V (-15% to +25%)/PoE (IEEE 802.3af)
Power Consumption	Basics: max. 1.5W (without light), Max. 6.5W (with speaker + light on)


EPC-LB6010R

2MP IR Fixed Bullet

Technical Specification

Operating Temperature	-25°C to 55°C (-13°F to 131°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP66
Certifications	CE-EMC (EN 55032:2015+A1:2020, EN IEC 61000-6-4:2019, EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A2:2021, EN 55035:2017+A11:2020, EN 50130-4:2011+A1:2014) FCC (FCC 47 CFR 15, Subpart B, ANSI C63.4-2014)
Material	Metal
Net Weight	0.38 kg (0.84 lb)
Dimensions	179.1mm (L) × 68.36mm (W) × 68.36 mm (H)

Dimension

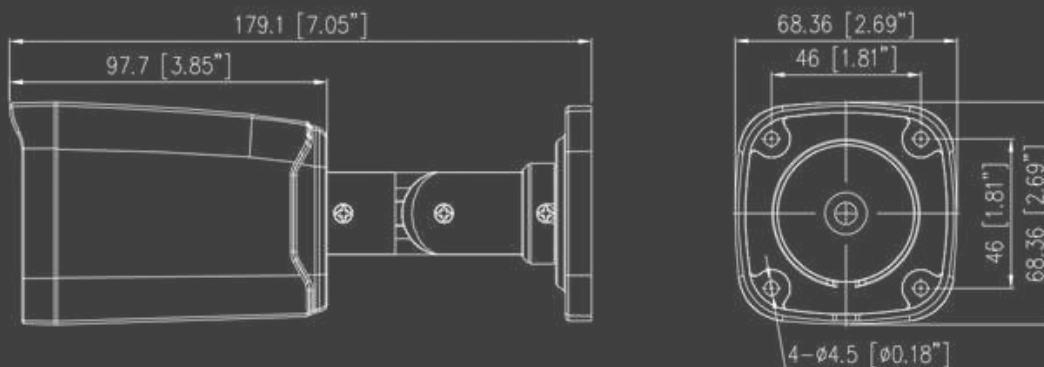

EPC-LB6010R

2MP IR Fixed Bullet

Accessories - Optional



EP-CBK646B - Junction Box



EP-CBK627D - Pole Mount

Ordering Information

EPC-LB6010R

Entrypass 2MP IR Fixed Bullet

EP-CBK646B

Junction Box

EP-CBK627D

Pole Mount



www.entrypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong,
Batu 12 Jalan Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entrypass.net

Singapore

No. 1, UBI View, #03-03, Focus ONE Building,
Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entrypass.net

Indonesia

PT Brikom Entrypas Indonesia
Jl. Griya Utama, Komplek Puri Mutiara Blok BF No. 17,
RT.1/RW.20, Sunter Agung, Tj. Priok, Kota Jkt Utara,
Daerah Khusus Ibukota Jakarta 14350.
Tel : +62 21 2937 6098
Email : info@entrypass.net